

## LOW SPIN WASHER

### RELIABILITY AND ROBUSTNESS

WEN 11  
WEN 14  
WEN 18

## FEATURES

- Low spin rigid-mounted washer extractor.
- It is important to fix the machine to the floor. Anchoring base to order separately (not included).
- G Force 100.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor EASY TOUCH with touch screen. 26 preset programs (4 economic programs).
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.



## OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings. Model WEN18.
- Drain pump kit for models WEN11 and WEN14.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- Anchorage base for correct fixation of the washer to the floor.
- 8 mm holes drum.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



Charge optimale



Inox



Eau chaude  
et Eau froide



Inverter



3 arrivées d'eau



Charge optimale



Installation et  
maintenance aisées




Tambour efficace



Wet cleaning

TECHNICAL DATA	UNIT.	WEN11	WEN14	WEN18
<b>DRUM</b>				
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18
Volume	l	100	130	180
Diameter	mm	620	620	700
Depth	mm	330	430	470
<b>GENERAL DETAILS</b>				
Washing speed / Spining speed	r.p.m.	53/536	53/536	50/505
G Factor	-	100	100	100
Self-service version	-	Yes	Yes	Yes
Double drain	-	No	Opt	Opt
Option 8mm holes drum	-	Yes	Yes	Yes
Weighing System / Tilting System	-	No/No	No/No	No/No
<b>DOOR</b>				
Height center door / Height base door	mm	570/310	570/310	655/395
Diameter	mm	373	373	373
<b>POWER</b>				
Motor	kW	0,75	1	1,5
Heating (Electric model)	kW	6	9	12
Max. power (Electric model)	kW	6,25	9,3	12,5
Max. power (steam and hot water)	kW	0,75	1	1,5
<b>CONNECTIONS</b>				
Water inlet	inch	3/4"	3/4"	3/4"
Steam inlet	inch	1/2"	1/2"	1/2"
Drain	mm/inch	80/3"	80/3"	80/3"
Maximum water consumption	Lit/h	135	168	218
Water main pressure	Kgs/cm <sup>2</sup>	2-4	2-4	2-4
Tension 230V - I + N	-	2x10+T - 50A	Opt 2x16+T - 63A	Opt 2x25+T - 100A
Tension 230V - III	-	3x4+T - 32A	3x6+T - 40A	3x10+T - 63A
Tension 400V - III + N	-	4x1,5+T - 16A	4x2,5+T - 25A	4x4+T - 32A
<b>DIMENSIONS / PACKING DIMENSIONS</b>				
Width / Width	mm	719/800	719/800	788/860
Depth / Depth	mm	665/990	810/990	828/1010
Height / Height	mm	1158/1350	1158/1350	1308/1500
Net weight / Gross weight	kg	217/225	239/247	281/301
Volume	m <sup>3</sup>	1,07	1,07	1,30

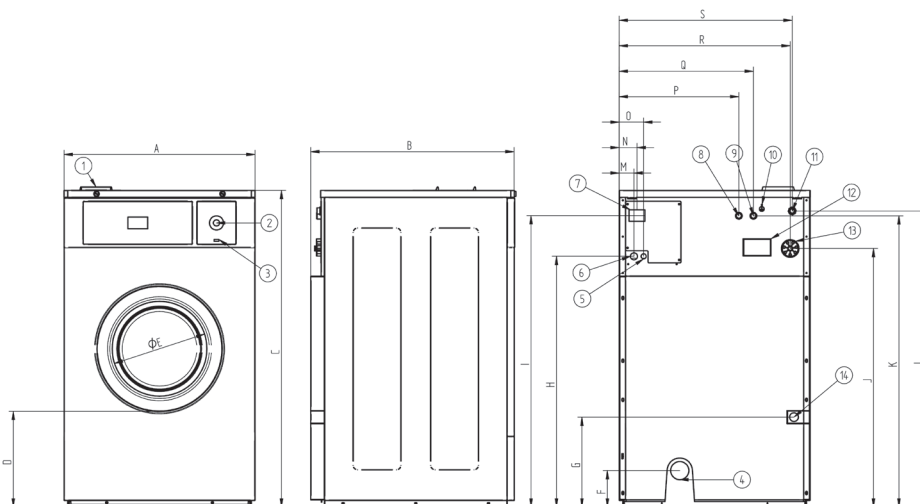

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
WEN11	719	684	1158	310	373	144	440	886	1055	940	1053	1073	61	74	101	440	495	637	650
WEN14	719	830	1158	310	373	144	440	886	1055	940	1053	1073	61	74	101	440	495	637	650
WEN18	788	840	1307	395	373	150	371	1035	1203	1067	1202	1222	61	74	101	494	554	706	714