

## LOW SPIN WASHER

### RELIABILITY AND ROBUSTNESS

WEN 27  
WEN 36

### FEATURES

- Low spin rigid-mounted washer extractor.
- It is important to fix the machine to the floor. Anchoring base to order separately (not included).
- G Force 100.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets (Hot water, Cold water, Soft water).
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor EASY TOUCH with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.



### OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- Anchorage base for correct fixation of the washer to the floor.
- 8 mm holes drum.
- Voltage 230 V III 50/60 Hz. Model WEN36.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



Charge optimale



Inox



Installation et maintenance aisées



Eau chaude et Eau froide



Tambour efficace



Inverter




Wet cleaning



3 arrivées d'eau

TECHNICAL DATA	UNIT.	WEN27	WEN36
<b>DRUM</b>			
Load capacity 1:9 / 1:10	Kg	28/25	39/35
Volume	l	250	350
Diameter	mm	770	860
Depth	mm	530	602
<b>GENERAL DETAILS</b>			
Washing speed / Spining speed	r.p.m.	48/481	45/455
G Factor	-	100	100
Self-service version	-	Yes	Yes
Double drain	-	Opt	Opt
Option 8mm holes drum	-	Yes	Yes
Weighing System / Tilting System	-	No/No	No/No
<b>DOOR</b>			
Height center door / Height base door	mm	700/440	735/375
Diameter	mm	373	560
<b>POWER</b>			
Motor	kW	2,2	3
Heating (Electric model)	kW	18	21
Max. power (Electric model)	kW	18,75	22
Max. power (steam and hot water)	kW	2,2	3
<b>CONNECTIONS</b>			
Water inlet	inch	3/4"	3/4"
Steam inlet	inch	3/4"	3/4"
Drain	mm/inch	80/3"	80/3"
Maximum water consumption	Lit/h	336	400
Water main pressure	Kgs/cm <sup>2</sup>	2-4	2-4
Tension 230V - I + N	-	No	No
Tension 230V - III	-	Opt 3x16+T - 80A	Opt 3x16+T - 80A
Tension 400V - III + N	-	4x6+T - 50A	4x6+T - 50A
<b>DIMENSIONS / PACKING DIMENSIONS</b>			
Width / Width	mm	884/930	979/1050
Depth / Depth	mm	965/1180	1066/1250
Height / Height	mm	1318/1560	1408/1600
Net weight / Gross weight	kg	340/370	473/503
Volume	m <sup>3</sup>	1,71	2,10

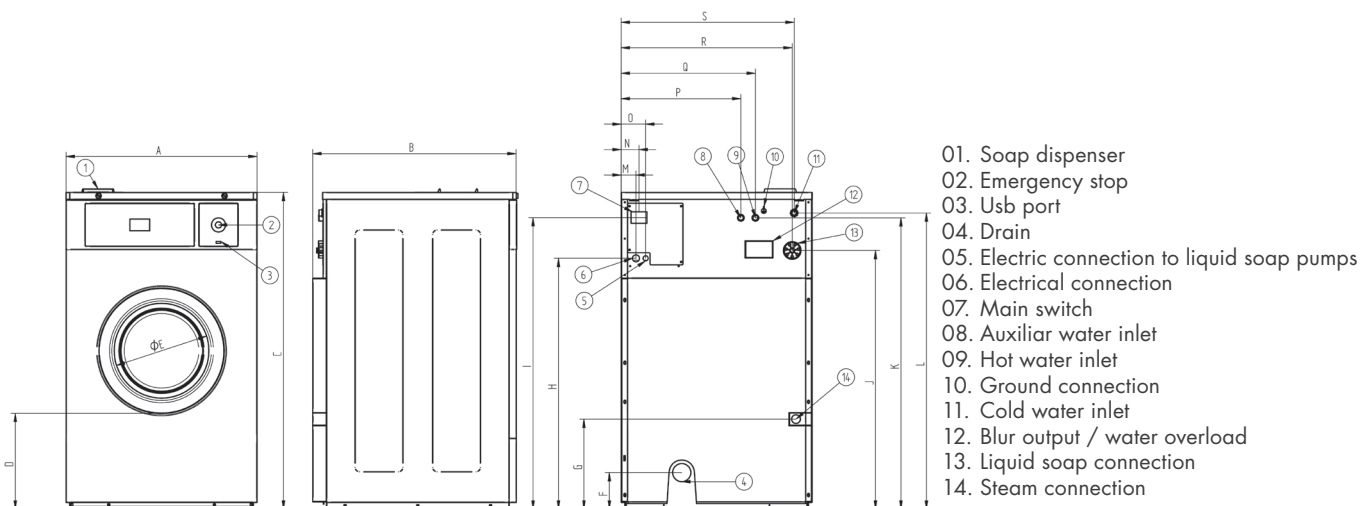

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
WEN27	884	1011	1307	440	373	138	543	1035	1203	1053	1218	1218	61	74	101	410	490	769	810
WEN36	979	1066	1411	366	560	143	625	1139	1307	1142	1322	1322	61	74	101	506	586	864	906