

LOW SPIN WASHER

RELIABILITY AND ROBUSTNESS

WEN 60

FEATURES

- Low spin rigid-mounted washer extractor.
- It is important to fix the machine to the floor. Anchoring base to order separately (not included).
- G Force 100.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor EASY TOUCH with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.



OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- Anchorage base for correct fixation of the washer to the floor.
- 8 mm holes drum.
- Voltage 230 V III 50/60 Hz.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



Charge optimale



Inox



Eau chaude et Eau froide



Inverter



3 arrivées d'eau



Charge optimale



Installation et maintenance aisées




Tambour efficace



Wet cleaning

| TECHNICAL DATA | UNIT. | WEN60 |
|--|---------------------|-------------------|
| DRUM | | |
| Load capacity 1:9 / 1:10 | Kg | 67/60 |
| Volume | l | 600 |
| Diameter | mm | 1048 |
| Depth | mm | 684 |
| GENERAL DETAILS | | |
| Washing speed / Spining speed | r.p.m. | 42,5/416 |
| G Factor | - | 100 |
| Self-service version | - | Yes |
| Double drain | - | Opt |
| Option 8mm holes drum | - | Yes |
| Weighing System / Tilting System | - | No/No |
| DOOR | | |
| Height center door / Height base door | mm | 900/540 |
| Diameter | mm | 560 |
| POWER | | |
| Motor | kW | 5,5 |
| Heating (Electric model) | kW | 28,8 |
| Max. power (Electric model) | kW | 31,3 |
| Max. power (steam and hot water) | kW | 5,5 |
| CONNECTIONS | | |
| Water inlet | inch | 3/4" |
| Steam inlet | inch | 3/4" |
| Drain | mm/inch | 80/3" |
| Maximum water consumption | Lit/h | 650 |
| Water main pressure | Kgs/cm ² | 2-4 |
| Tension 230V - I + N | - | No |
| Tension 230V - III | - | Opt 3x25+T - 100A |
| Tension 400V - III + N | - | 4x10+T - 63A |
| DIMENSIONS / PACKING DIMENSIONS | | |
| Width / Width | mm | 1225/1360 |
| Depth / Depth | mm | 1280/1460 |
| Height / Height | mm | 1640/1880 |
| Net weight / Gross weight | kg | 930/1050 |
| Volume | m ³ | 3,73 |

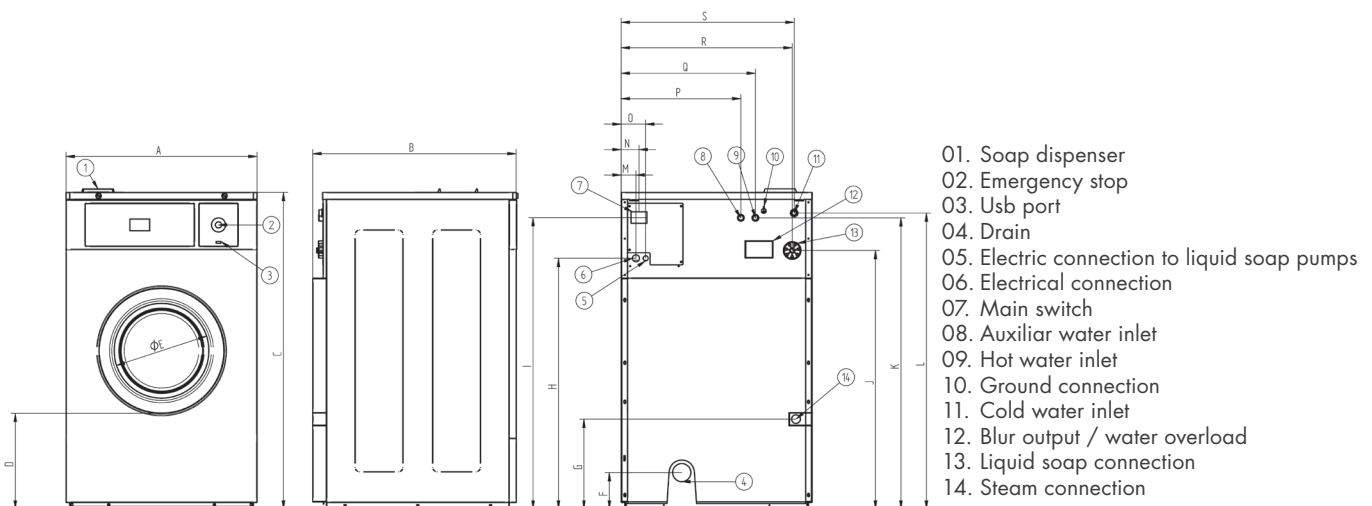

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S |
|-------|------|------|------|-----|-----|----|-----|------|------|------|------|------|----|----|-----|-----|-----|------|------|
| WEN60 | 1225 | 1279 | 1640 | 539 | 560 | 98 | 631 | 1367 | 1535 | 1385 | 1550 | 1550 | 61 | 74 | 101 | 750 | 830 | 1110 | 1150 |